




THE **DURATRAC** GROUP

Innovation. Strength. Precision.

AlphaMax Ultra Deck

Ground Protection & Decking System

Ultra Performance

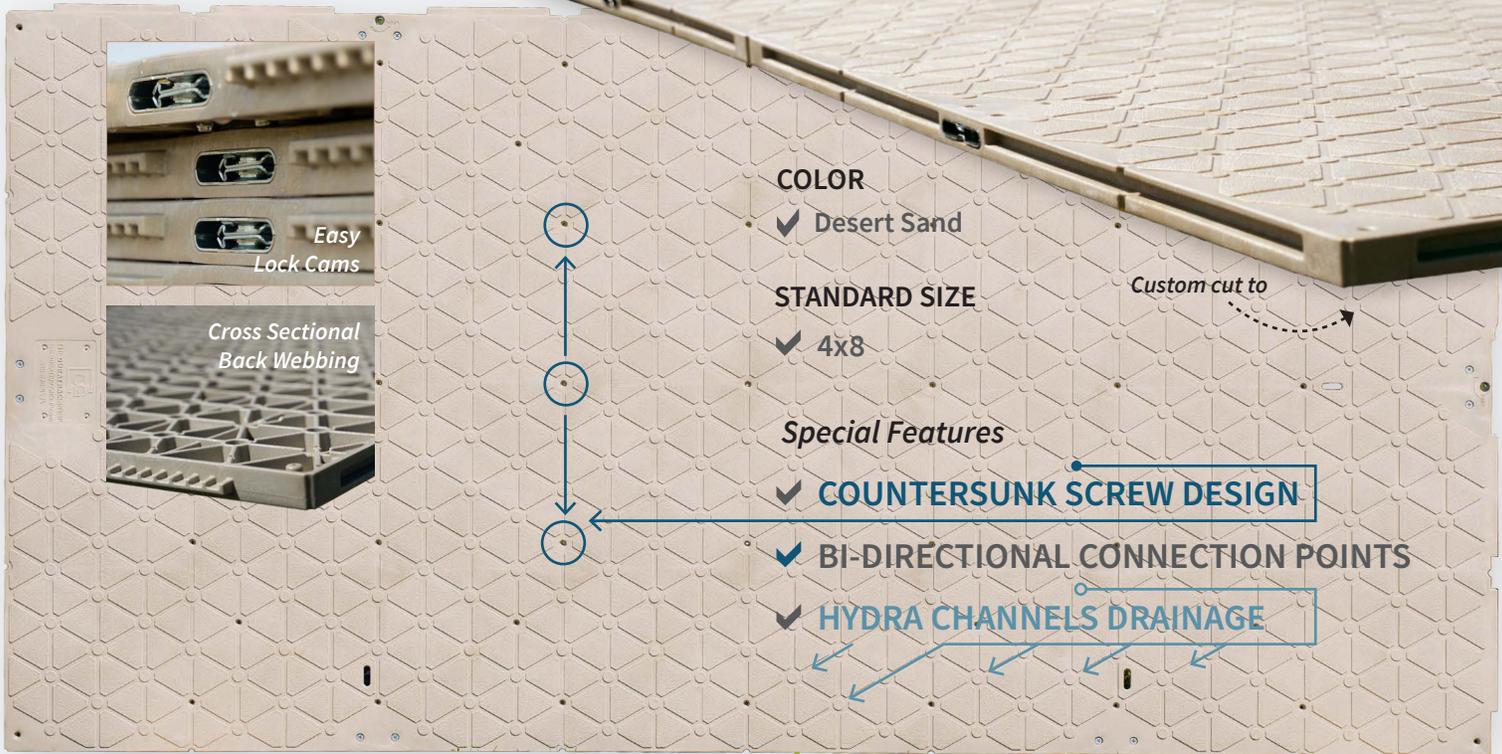

The **AlphaMax Ultra Deck** from The Duratrac Group is the smarter, stronger, and more sustainable alternative to wood.

Engineered for renewability through fully recyclable materials, it delivers unmatched durability—handling over **50,000 lbs per square foot on the ground** and outperforming plywood in elevated strength.

With the exclusive **AlphaMax Transition Strip and Trim Edge**, it easily integrates with plywood where needed, while its **bi-directional connection points and countersunk screw design** cut installation time in half. Fewer screws—60% less per floor—and up to **19,200 sq. ft. per truckload** means faster builds, lower costs, and reduced labor.

Ground Protection Excellence

- **Laydown Floors:** Protect sensitive surfaces and undulating contours on ground with confidence.
- **Stadiums & Large Venues:** Create durable, stable platforms for heavy traffic.
- **Temporary Roadways:** Reliable access routes across challenging terrain, supports heavy loads and equipment.
- **Tent & Structure Floors:** Provide rock-solid foundations for events of any size.



Eco-Friendly Innovation: Made with renewable, sustainable materials that are 100% recyclable.



888-828-9535 | DuraTrac.net | info@DuraTrac.net

AlphaMax Ultra Deck


Flooring Without Limits

Solve today's challenges and adapt to tomorrow's demands.



Elevatable Solutions


- **On Scaffold:** Seamlessly integrates with scaffold systems or elevated flooring.
- **System Ready:** Designed for compatibility with advanced modular systems.
- **Wood Replacement:** Lighter, stronger, and more eco-friendly than plywood. 20+ year life-span.
- **Quick Installation:** Cut project timelines with faster deployment.
- **Freight & Labor Savings:** Lightweight panels reduce shipping and manpower costs.

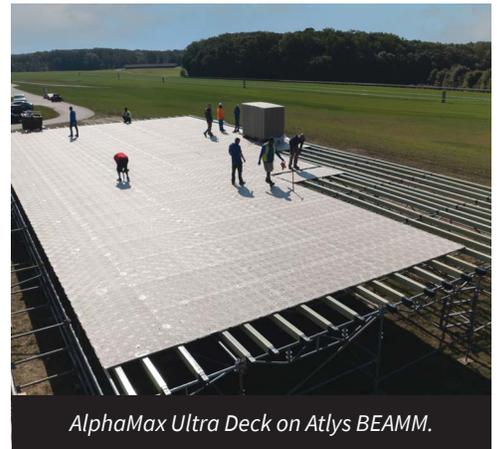

AlphaMax Ultra Deck on Atlys BEAMM.



Strip and Trim Edge create a smooth, wood-ready connection.

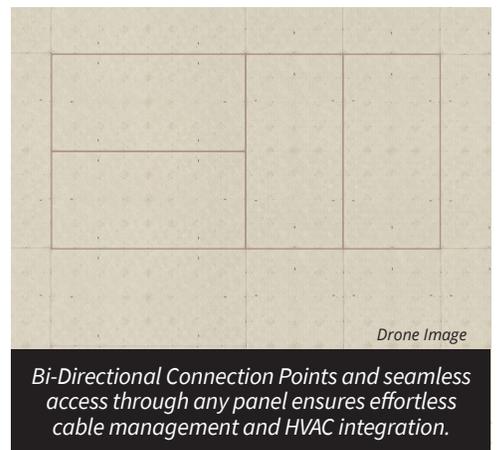

Drone Image

Bi-Directional Connection Points and seamless access through any panel ensures effortless cable management and HVAC integration.



Built in Tongue and Groove design and Easy Lock Cams for fast installation.

Specifications

AlphaMax Ultra

Dimensions

Standard: 4 ft. x 8 ft. X 1.25 in. thick
Custom: 4 ft. x 2 ft., 4 ft. x 4 ft., 4 ft. x 6 ft.

Usable Surface Area 32 sq. ft

Weight 72 lbs.

Load Capacity *Elevated:* 150 psf @ 24" On-Center (OC)
Laydown: 50,000+ psf on Bearing Ground

Material 100% Prime Spec Virgin HDPE

Slip Resistance Textured surface. Built in hydra channels & drainage pts.

Durability Resistant to corrosion, chemicals, solvents, insects, bacteria and detergent

Cleaning Medium to high pressure wash.
Use Detergents and antibacterial agents.

Flame Resistance Exceeds UL94HB

Decks Per Pallet 50 Decks by 4x8 pallet

Shipping *U.S. Standard 48 ft Flatbed truck:*
600 Decks. 12 Pallets per truck. 19,200 sq. ft. total
20 ft ISO Shipping Container: 350 Decks
40 ft ISO HC Shipping Container: 700 Decks

Floor Covering Carpet, turf, tile squares, vinyl plank, hardwood & more.



888-828-9535 | DuraTrac.net | info@DuraTrac.net